

3D Printing: Improving Fiber Deposition Accuracy in Melt Electrowriting

Reference No: B80072


CHALLENGE

Melt electrowriting (MEW) is a high-resolution 3D printing technique that combines elements of electrohydrodynamic fiber formation and polymer melt extrusion. The ability to precisely deposit micro- to nanometer fibers of biocompatible polymers in a layer-by-layer fashion makes MEW a promising scaffold fabrication method for all kinds of tissue engineering applications. The general principle of MEW can be divided into two steps: firstly, the molten material is extruded through a nozzle using air pressure or volumetric dispensing. Secondly, by applying a high voltage electric field between the nozzle and a collector, the extruded polymer droplet transforms into a Taylor Cone from which a fiber jet emerges that travels towards the collector.¹ Accurate scaffolds are formed when the fiber jet is deposited in a direct writing mode layer-by-layer. Maintaining precise fiber placement throughout a print is crucial to obtain clinically relevant scaffolds.

However, with increasing build height a varying nozzle-to-scaffold distance and accumulating residual charges in previously deposited fibers lead to electric field variations that complicate accurate fiber placement resulting in adverse effects such as fiber pulsing² or bridging³.

INNOVATION

The presence of residual charges in previously deposited polymer material bends electric field lines due to a spatially varying dielectric constant and therefore distorts the deposition pattern of subsequent polymer layers. Consequently, this innovation proposes to submerge the collector layer-by-layer into a vat containing a liquid of a specific dielectric constant. The liquid serves to reduce the spatial variation of the relative dielectric constant and may also accept charges from the deposited polymer material. This results in a more uniform electric field enabling accurate fiber deposition even at large build heights.

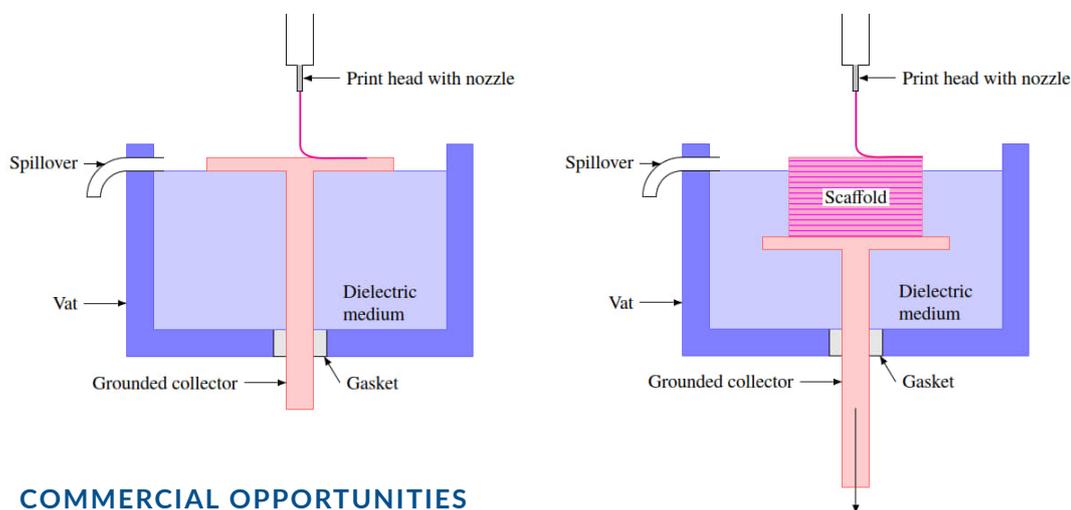

COMMERCIAL OPPORTUNITIES


The invention is relevant to polymer 3D printing of microscale structures.

DEVELOPMENT STATUS

The invention was tested in first experiments.

REFERENCES:

- 1 Loewner, S., Heene, S., Baroth, T., Heymann, H., Cholewa, F., Blume, H., Blume, C. (2022). Recent Advances in melt electro writing for tissue engineering for 3D printing of microporous scaffolds for tissue engineering. *Front. Bioeng. Biotechnol.* 17. <https://doi.org/10.3389/fbioe.2022.896719>
- 2 Hochleitner, G., Youssef, A., Hrynevich, A., Haigh, J.N., Jungst, T., Groll, J. und Dalton, P.D. (2016). Fibre pulsing during melt electrospinning writing. *BioNanoMaterials* 17 (3-4). <https://doi.org/10.1515/bnm-2015-0022>
- 3 Kim, J., Bakirci, E., O'Neill, K.L., Hrynevich, A., Dalton, P.D. (2021). Fiber Bridging during Melt Electrowriting of Poly(ϵ -Caprolactone) and the Influence of Fiber Diameter and Wall Height. *Macromolec. Mat. And Eng.* 306 (3). <https://doi.org/10.1002/mame.202000685>



BayPAT



Technology from
TECHNICAL
UNIVERSITY OF
MUNICH

IP rights:

EP filed in 2020
PCT filed in 2021

Contact:

Dr. Bettina Baumeister
+49 (0) 89 5480 177 - 32
bbaumeister@baypat.de

**Bayerische
Patentallianz GmbH**
Prinzregentenstr. 52
80538 München
www.baypat.de